

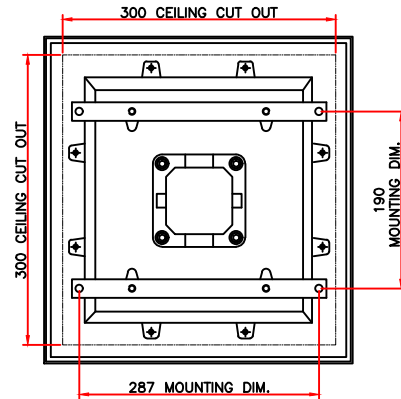
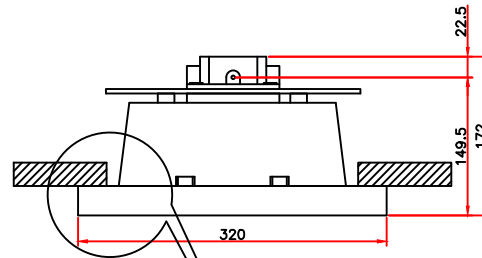


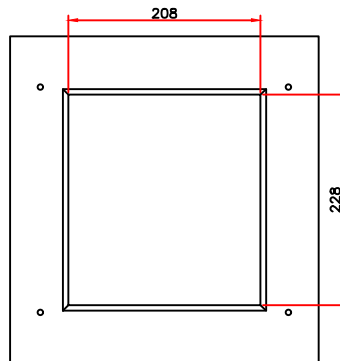

CUT OUT SIZE
300mm x 300mm

S.S. PLATE SIZE
320mm x 320mm

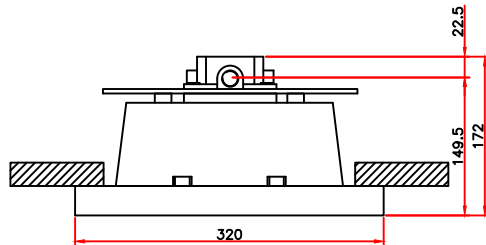

FALSE CEILING

S.S. PLATE

FITTING

TECHNICAL DATA

TYPE No.:EXEC-45W-SQ

ENCLOSURE :

Ex-d AS PER IS-2148-2004 (IEC 60076-1/2004) & IS 2206 (PART-1)

PROTECTION :

IP-66 AS PER IS:12063/1987

AREA CLASSIFICATION :

Div./ZONE - 1 & 2 GAS GROUP IIA ; IIB & IIC.

MATERIAL OF CONSTRUCTION :

CAST AL. ALLOY LM-6.

RATING :45W

COMPONENT :

5050 Led Module (Bridgelux Make Led) 45W 01Nos.

54V, 650mA -45W - Hr Make Driver 01Nos.

HARDWARE :

S.S. - 304

CABLE ENTRY :

2Nos. x 3/4"ET,(3C X 2.5Sqmm)

EARTHING :

1 No. INSIDE & 2Nos OUTSIDE

FINISH :

SEMENCE GREY EPOXY SHADE RAL -7032 AS PER IS:5.

WEIGHT :

4.000 Kg. (APPROX)

CLIENT :		P.O. No. :		
CONSULTANT:		ITEM No.:	BOQ No.:	QTY.:
		EXPLOSIONPROOF ELECTRICAL CONTROL		
		PLOT NO. 920, 4 TH PHASE, G.I.D.C, VAPI DIS. VALSAD.		
TITLE :		FLAMEPROOF & WEATHERPROOF BULKHEAD FITTING FOR GAS Gr. I, IIA,IIB.		
DRN BY	CHKD BY	DATE	SCALE	REV.
kalpesh v.c.	A.B.PATEL	04/04/12	N.T.S.	0
DRG. No.:				Sheet No. 1 of 1