

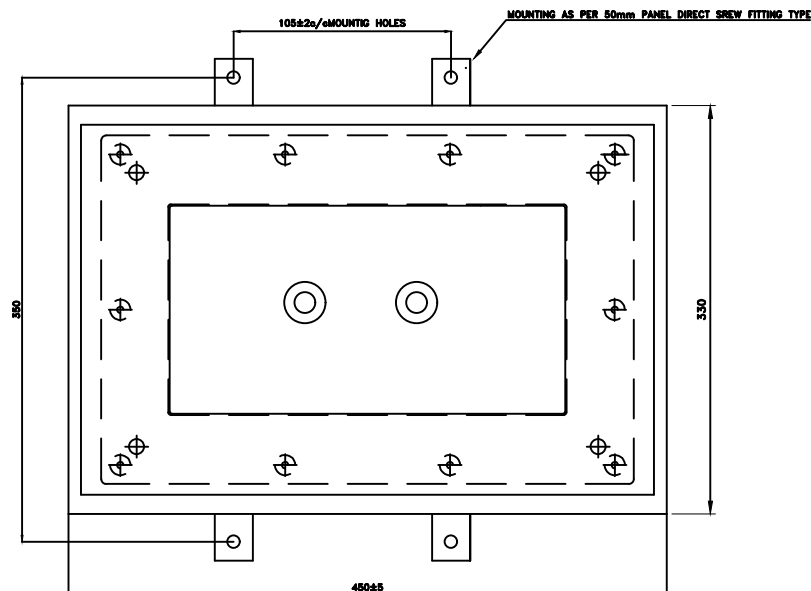
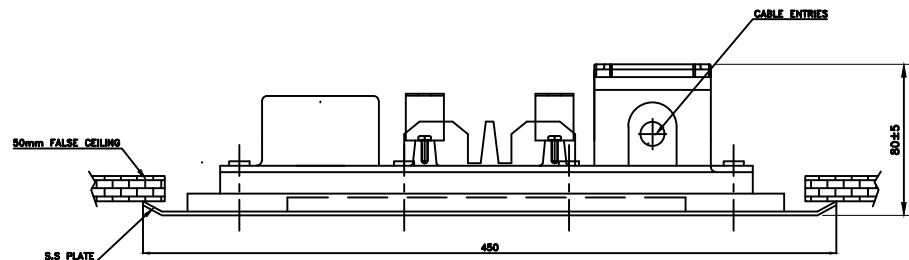


PLATE SIZE: 450x330mm
CUT OUT SIZE: 410x290mm

TYPE No. : EXEC-40W-BH

TECHNICAL DATA

ENCLOSUE :

Ex-d AS PER IEC 60079-1/2007, IS-12063/1987

PROTECTION :

IP-65 AS PER IS:10322.

ARE CLASSIFICATION :

Div./ZONE - 1 & 2 GAS GROUP IIA,IIB & IIC

MATERIAL OF CONSTRUCTION :

DIE CAST AL ALLOY.

RATING & TEMP. CLASSIFICATION :

2 X 20W,

COMPONENT :

A) HEAVY DUTY DRIVER 54V, 650mA - 20W - Hr Make Driver X 2 NO.S

B) 5050 Led Module (Bridgelux Make Led) 20W - 2 NO.S

C) 125W LUMENES PER WATT LED/ 7500 LUMENES

D) COLOR TEMP 5700K

TRANSPARENT PART :

HEAT RESISTANT & TOUGHENED TYPE 'A' BOROSILICATED DOME GLASS 'ExEC MAKE'.

GASKET :

ENDLESS, MOULDED NEOPRENE

CABLE ENTRY :

UP TO 3/4 ET x 2 Nos.

1 NO. STOPPING PLUG

EARTHING :

1 No. INSIDE & 2 Nos. OUTSIDE

FINISH :

RAL-7032

WEIGHT :

8.5 Kgs (APPROX)

CLIENT :

BOQ NO.:

CONSULTANT:

Item No:

QTY :



EXPLOSIONPROOF ELECTRICAL CONTROL

PLOT NO. 920 IVth phase G.I.D.C. VAPI - 396 195

TITLE : FLP/WP BOTTOM OPENABLE LED LIGHTING FITTING INTEGRATED
CONTROL GEAR BOX FOR GAS Gr. I,IIA,IIB & IIC

DRN BY	CHKD BY	DATE
N.F.E.A.D.	A.B. Patel	08/02/11